




Seal-A-Key

Waterproof Silicone Rubber

Sub Panel Mounting


Tactile Feedback

LED Backlighting Option

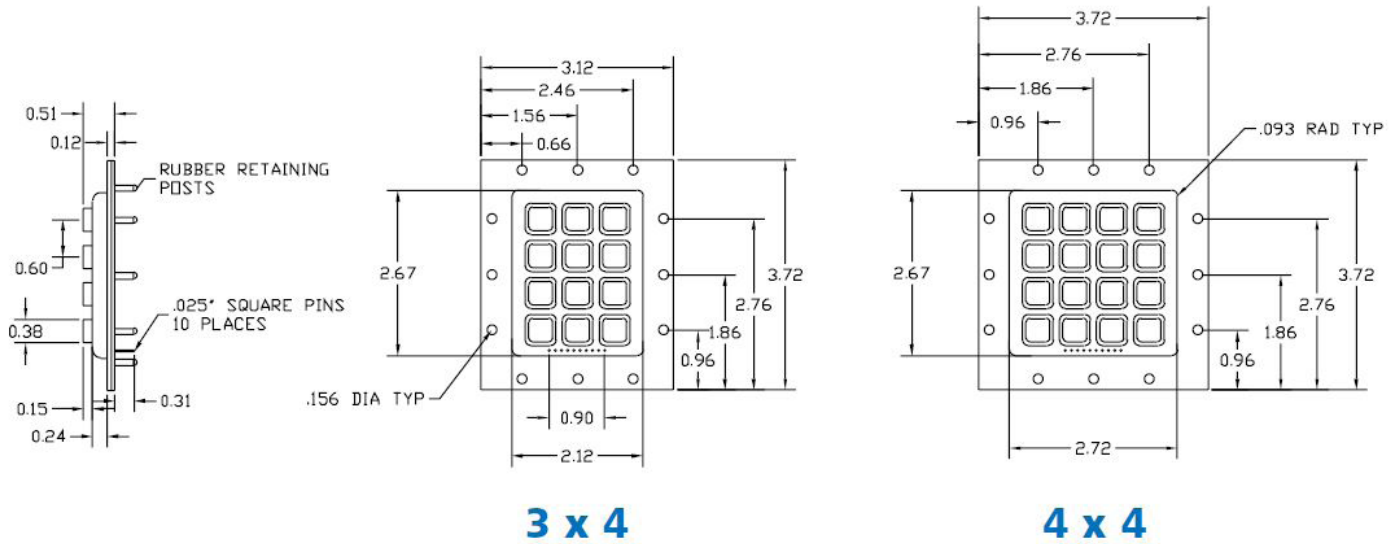

Ordering Code: SAK – XX-X-X-X

SAK	XX	X	X	X
	Model Number	Circuit Code	Boot Color	Legend
	92 – 3x4	B – X-Y Matrix	A - Charcoal Gray	A – Numeric
	96 – 4x4	C – Custom	B – White-backlit	B - Telephone

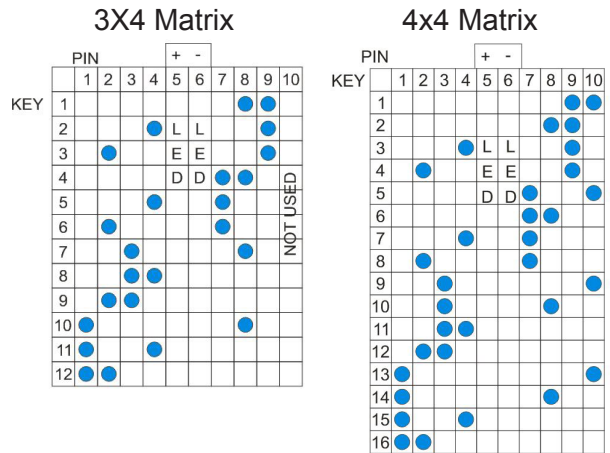

Electrical

Contact Configuration	SPST Normally Open
Current/Voltage	10ma @ 24 Volts
Breakdown Voltage	Over 250 Volts
Contact Resistance	< 100 ohms
Contact Bounce	<10 ms
Backlighting	20 ma @ 2.2 VDC

Materials

Rubber Boot	Silicone
Printed Circuit Board	FR4 Glass Epoxy
Terminals Centers	.025 Square Pins .100

Mechanical

Life Expectancy	1 Million Cycles
Travel	.015 inch
Force	220 +/- 30 grams
Storage Temp.	-40C to 90C
Operating Temp.	-20C to 75C
Humidity	0 – 98% No Condensation